



MODEL xFxLU-0GG01 series

3.5 x 3.5mm Metal Sealed SMD Hemispherical Lens Type

Mechanical Specifications and Materials (Unit: mm)

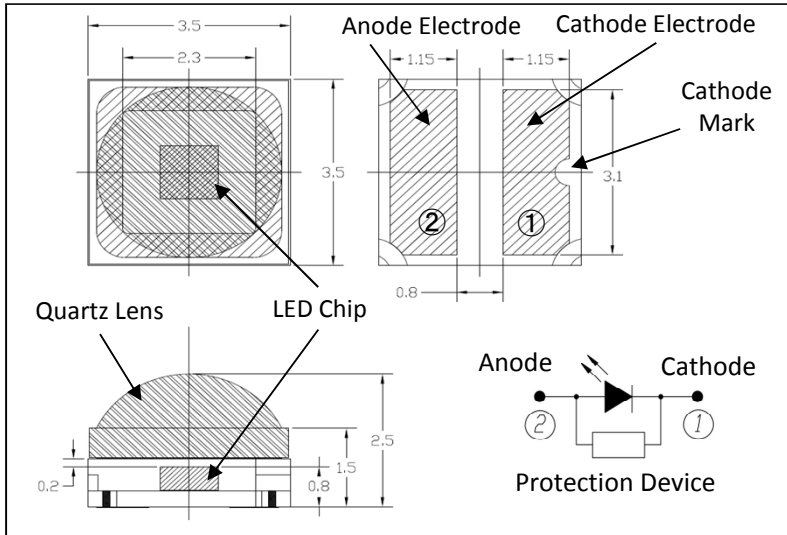

Product ID

275nm: DF7LU-0GG01

280nm: DF8LU-0GG01

310nm: UF1LU-0GG01

325nm: UF3LU-0GG01

340nm: UF4LU-0GG01

Typical Optical-Electrical Characteristics

I_F=350mA, T_a=25°C

Item	Symbol	Unit	DF7LU-0GG01			DF8LU-0GG01			UF1LU-0GG01			UF3LU-0GG01			UF4LU-0GG01		
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
Peak Wavelength(*)	λ_p	nm	270	275	280	275	280	285	303	308	313	320	325	330	335	340	345
Radiant Flux(**)	P _o	mW	19	29	39	19	29	39	24	39	48	24	35	43	24	35	43
Full Width at Half Maximum	$\Delta\lambda$	nm	-	11	-	-	11	-	-	14	-	-	12	-	-	10	-
Forward voltage	V _F	V	-	5.4	-	-	5.4	-	-	5.5	-	-	5.2	-	-	5.0	-
Viewing Half Angle	2 $\theta_{1/2}$	deg.	-	65	-	-	65	-	-	65	-	-	65	-	-	65	-

I_F=600mA, T_a=25°C

Item	Symbol	Unit	DF7LU-0GG01			DF8LU-0GG01			UF1LU-0GG01			UF3LU-0GG01			UF4LU-0GG01		
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
Peak Wavelength(*)	λ_p	nm	-	(275)	-	-	(280)	-	-	(308)	-	-	(325)	-	-	(340)	-
Radiant Flux(**)	P _o	mW	-	43	-	-	43	-	-	58	-	-	54	-	-	58	-
Full Width at Half Maximum	$\Delta\lambda$	nm	-	(12)	-	-	(12)	-	-	(15)	-	-	(12)	-	-	(10)	-
Forward voltage	V _F	V	-	6.0	-	-	6.0	-	-	6.0	-	-	5.5	-	-	5.2	-
Viewing Half Angle	2 $\theta_{1/2}$	deg.	-	65	-	-	65	-	-	65	-	-	65	-	-	65	-

(*)Peak Wavelength Measurement tolerance is ± 3 nm.

(**)Radiant Flux Measurement tolerance is $\pm 10\%$.

Specification and dimension are subject to change for improvement without notice.


⚠ **WARNING**

- LEDs emit very strong UV radiation.
- Do not look at the LED light with the naked eye or irradiate the skin.
UV radiation can harm your eyes and skin.
- To prevent UV radiation exposure, wear protective eyewear and protective equipment.
- If LEDs are embedded in devices, please indicate warning labels against the UV light LED used.
- Keep out of reach of children.


MODEL xFxLU-0GG01 series

3.5 x 3.5mm Metal Sealed SMD Hemispherical Lens Type


Forward Voltage vs Forward Current

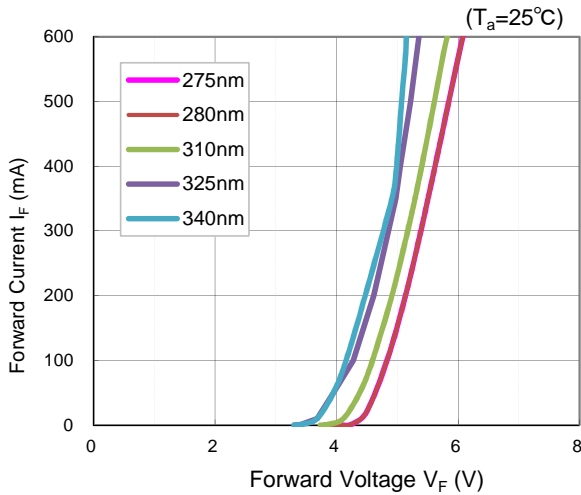


Forward Current vs Radiant Flux

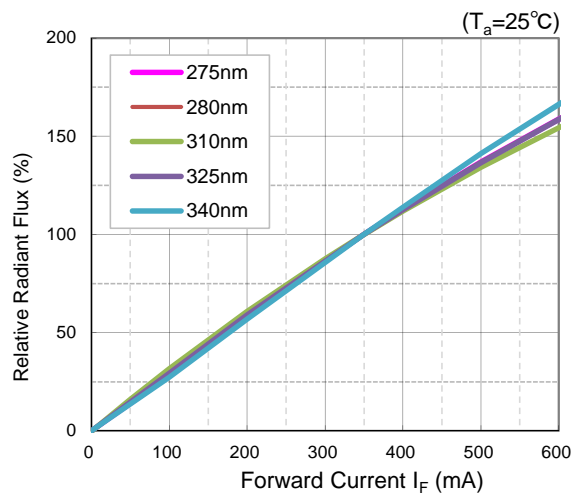


Spectrum

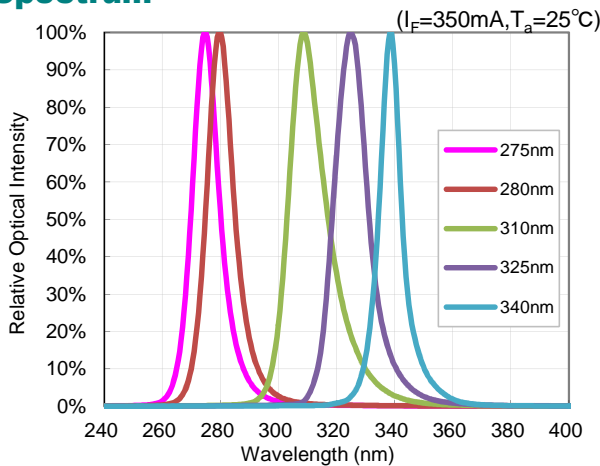


Radiation Pattern

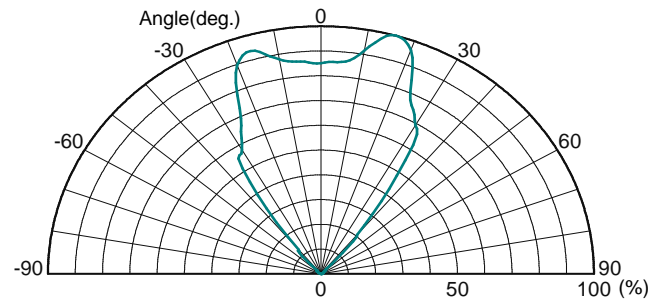

Recommended solder pad



Reflow soldering profile

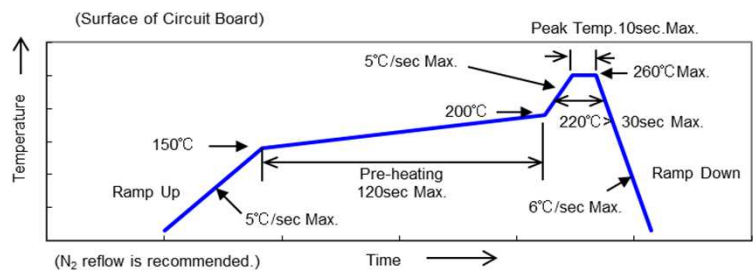

[Japan] DOWA Electronics Materials Co., Ltd
Akihabara UDX Bldg. 4-14-1 Sotokanda, Chiyoda-ku, Tokyo 101-0021, Japan / Phone: +81-3-6847-1253
[USA] DOWA International Corp. San Jose office
4320 Stevens Creek Blvd. Suite 125, San Jose CA 95129, USA / Phone: +1-408-236-7560
[EU] DOWA HD Europe GmbH
Ostendstrasse 196, D-90482, Nurnberg, Germany / Phone: +49-911-56989-320