

MODEL xFxVL-1F131 series

TO-39 Flat Can Type




Mechanical Specifications and Materials (Unit: mm)

Product ID

310nm: UF1VL-1F131

325nm: UF3VL-1F131

340nm: UF4VL-1F131

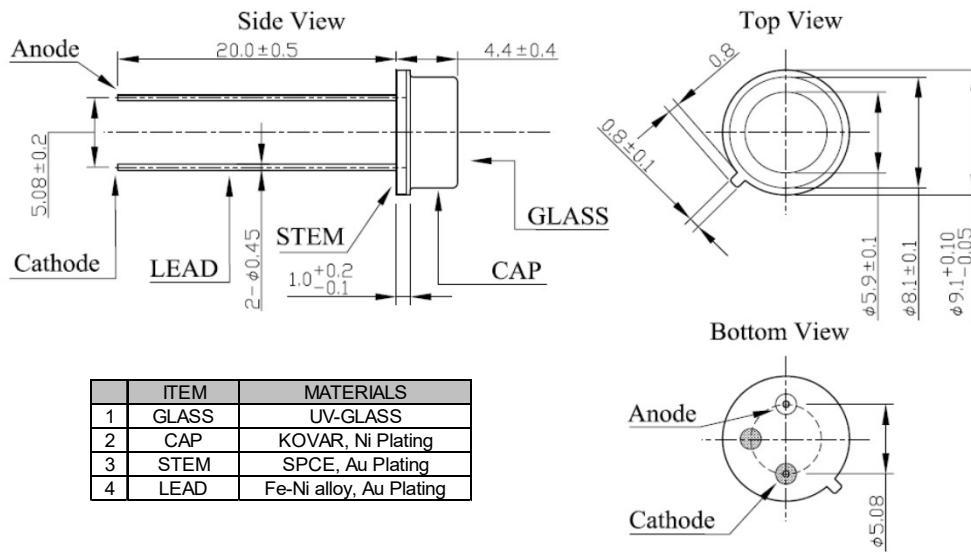

	ITEM	MATERIALS
1	GLASS	UV-GLASS
2	CAP	KOVAR, Ni Plating
3	STEM	SPCE, Au Plating
4	LEAD	Fe-Ni alloy, Au Plating

Typical Optical-Electrical Characteristics (I_F=20mA, T_a=25°C)

Item	Symbol	Unit	UF1VL	UF3VL	UF4VL
Peak Wavelength	(*) λ _p	nm	310±5	325±5	340±5
Radiant Flux	(**) P _o	mW	1.5	1.7	1.7
Full Width at Half Maximum	∠λ	nm	15	11	9
Forward Voltage	V _F	V	5	4.5	4.0
Viewing Half Angle	2θ _{1/2}	deg.	114	114	114

(*)Peak Wavelength Measurement tolerance is ±3nm.


(**)Radiant Flux Measurement tolerance is ±10%.

Specification and dimension are subject to change for improvement without notice.


Absolute Maximum Ratings

Item	Symbol	Unit	Ambient Temperature	
Forward Current	I _{Fmax}	mA	40	T _a =25°C
Operating Temperature	T _{OPR}	°C	-30 ~ +80	
Storage Temperature	T _{STG}	°C	-40 ~ +100	
Soldering Temperature	T _{SOL}	°C	350 (within 3sec)	Manual soldering process
			250 (within 5sec)	Flow soldering process


Forward Voltage vs Forward Current

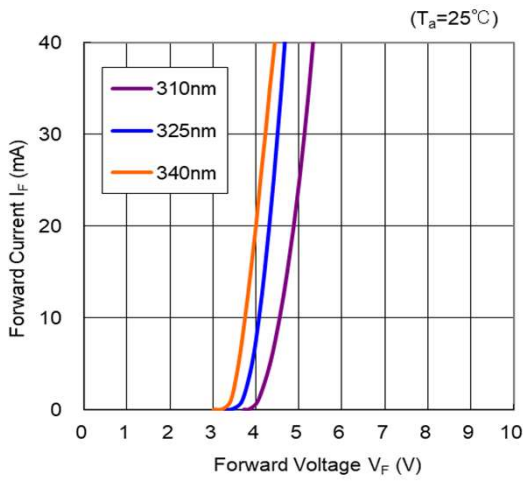


Forward Current vs Radiant Flux

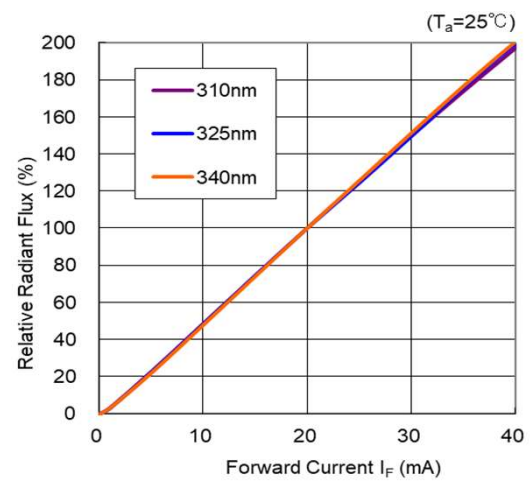

Spectrum

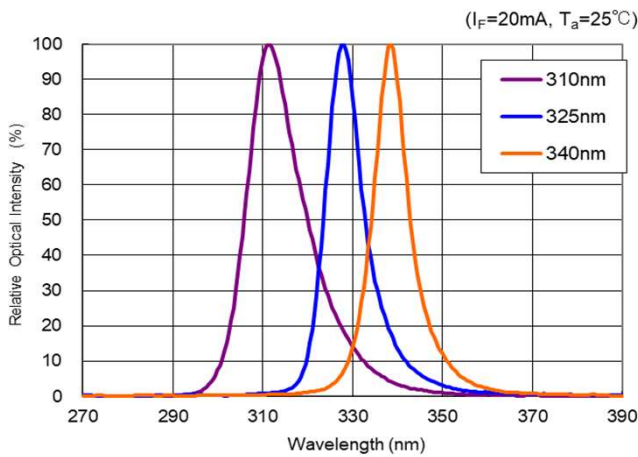

Radiation Pattern

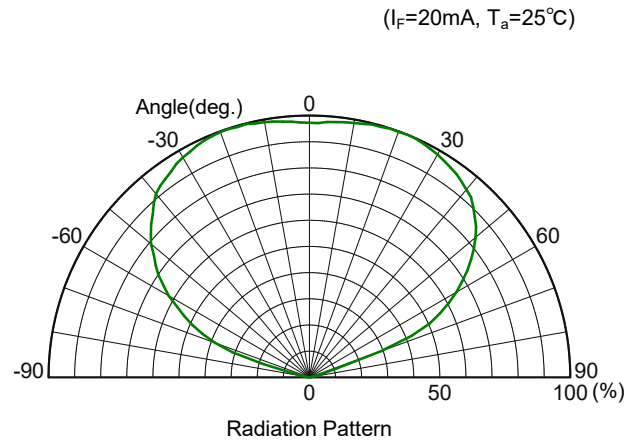

WARNING

- LEDs emit very strong UV radiation.
- Do not look at the LED light with the naked eye or irradiate the skin.
UV radiation can harm your eyes and skin.
- To prevent UV radiation exposure, wear protective eyewear and protective equipment.
- If LEDs are embedded in devices, please indicate warning labels against the UV light LED used.
- Keep out of reach of children.