

## Model DF8E series

### Naked Bare Die (Flip chip form, Au Pad)

For the main stream applications


#### Typical Optical-Electrical Characteristics


( $I_F=20\text{mA}$ ,  $T_a=25^\circ\text{C}$ )

Item	Symbol	Unit	DF8E		
			Min	Typ	Max
Peak Wavelength	$\rho$	nm	275	280	285
Radiant Flux	$P_o$	mW	-	3.1	-
Full Width at Half Maximum	$\Delta$	nm	-	11	-
Forward Voltage	$V_F$	V	-	5.2	-

#### Product ID, Physical dimensions and Sample photo

### DF8EC-00001

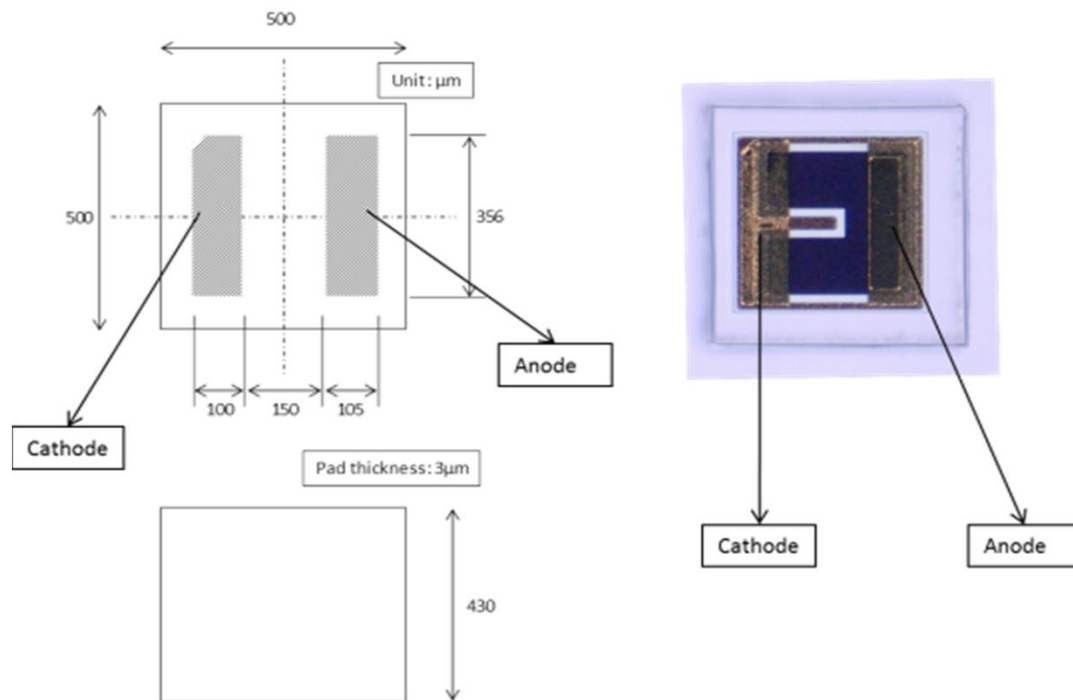




⚠ WARNING

- LEDs emit very strong UV radiation.
- Do not look at the LED light with the naked eye or irradiate the skin.
- UV radiation can harm your eyes and skin.
- To prevent UV radiation exposure, wear protective eyewear and protective equipment.
- If LEDs are embedded in devices, please indicate warning labels against the UV light LED used.
- Keep out of reach of children.
- Specification and dimension are subject to change for improvement without notice.

## Model DF8E series

### Naked Bare Die (Flip chip form, Au Pad)

#### Forward Voltage vs Forward Current

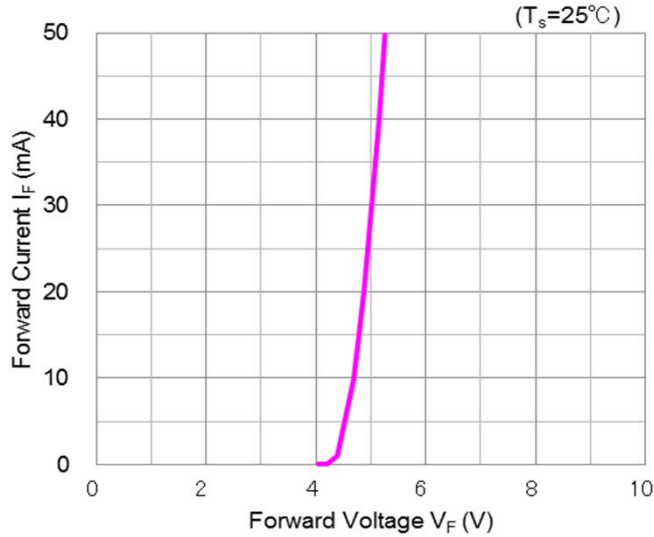

#### Forward Current vs Radiated Flux

